

- Fast media loading for large format touch screens & interactive POS
- Decoding of true HD encoded movies
- Flexible options – LiveTV input, Wifi, Cat5 Extender & ImageFlyer
- Highest Specification player
- Fully qualified for 24/7 operation – designed for continuous use
- Rugged steel construction
- AMD Socket AM3 Dual Core CPU
- Integrated ATI Radeon HD 4200 graphics with VGA, DVI and HDMI
- Windows<sup>®</sup> operating system, for easy network integration
- Small form factor 300 x 200 x 57mm
- Bios options essential for digital signage
- Wall/ceiling mounts included as standard



The SWEP-TS is designed on the high speed BCT-L3 platform for applications requiring ultra fast loading of signage screens and decoding of true HD movies. The SWEP-TS is ideal for large format touch screens, interactive retail point of sale, Interactive DVD previews and more.

Independent dual outputs configurable as either VGA and DVI-D or VGA and HDMI, both setups capable of supporting resolutions from 800x600 up to FULL HD (1920x1080) and more, allowing the unit to connect to almost every electronic screen technology available. In extended desktop mode resolutions of 3840x1080 can easily be supported (as can portrait mode operation).

Unattended operation capabilities are supported with bios options for 'boot on power up', 'boot after power fail', Wake-on-Lan, RTC wake up (turn on at specific times of day).

For data transfer the SWEP-TS features gigabit Ethernet and 6 USB 2.0 ports plus a wifi card option.

The SWEP-TS can be purchased with a full license of ImageFlyer, for a complete out-of-the box signage solution, or on its own for customers with a Sedao digital signage site license, or those simply wishing to upgrade to the added functionality of the SWEP software.

Sedao's SWEP software turns any PC running ImageFlyer into an easy-to-administer digital signage intranet site.

Once installed, you can allocate a zone of your screen to a user who can be limited to only change that zone. The user cannot affect anyone else's messages and can be quickly trained to update their own messages, typically in under a minute.

In addition to simplifying the overall user experience of owning a signage system, the addition of SWEP's web server and database technology to a PC also allows added power user digital signage functions including:

### Emergency Notifications

Single button click forces screens to display your own set of pre-created emergency or important messages. Ideal for fire drills, sales incentives, security alerts and more.



### Instant Messaging

Edit a message and override your screens with your message. After the message screens go back to what they were playing before. Ideal for doctors surgeries patient call system, visitor announcements, factory floors information, manager to staff communications and more.



### Advanced Presentation Scheduling

Create presentation groups to allow for group scheduling.

Play one screen layout for a few minutes then play a second, third, then fourth etc and loop back to the first.



### Scheduling of System Commands

Shutdown players at night to save energy.

Configure triggering any of your own windows system commands. Trigger backups, batch files and more.




### Direct Link to VNC Remote Desktop

Connect directly in to your players (running any VNC compatible client) to see what's on screen or even use your own mouse and keyboard to directly control your player.



## SWEP-TS Technical Specification

<b>Operating System:</b>	Windows® Professional	
<b>Main Board:</b>	AMD Athlon 2 240e 2.8Ghz Dual Core CPU AMD 785G northbridge and SB700 southbridge chipset ATI Radeon HD 4200 with DirectX®10 and ATI Avivo™ HD1 support	
<b>Main Memory:</b>	2GB DDR2 800Mhz SDRAM	
<b>I/O Interface-Rear:</b>	1 x HDMI Port 1 x DB9 RS232 COM port 1 x DVI-D port 12VDC Power In	2 x LED for Storage and Power 1 x DB15 VGA port 4 x USB 2.0 ports 1 x RJ45 10/100/1000 Mbps Ethernet
<b>Storage:</b>	1 x 2.5" SATA 160Gbyte HDD	
<b>Dimensions:</b>	300mm (W) x 200mm (D) x 57mm (H) (without mounting bracket)	
<b>Power Input:</b>	1 x External 100 - 240 AC power adaptor	
<b>Environment:</b>	Operating Temperature: +0°C to +40°C Storage Temperature: -20°C to +70°C Humidity: 5-90% non-condensing	
<b>Certification:</b>	EN55022 Class A – Emissions, EN55024 Susceptibility, EN60950 Safety	
<b>Extras:</b>	Wall mounting bracket provided free of charge	

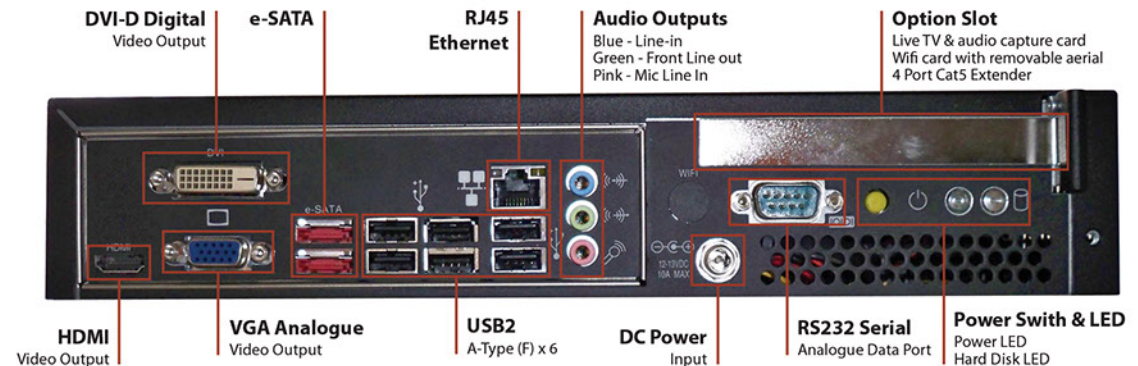

### Options

The SWEP-TS is provided as standard, with an installed suite of Sedao software these applications can be extended by using our unlimited site licensing system. For single player operation the SWEP-TS can be supplied with fully licensed software. Hardware options include

- LiveTV and audio capture (composite video and stereo audio input)
- Wifi with removable (extendable) aerial and 1.5 metre aerial extension
- Internal Xtended VGA 4 port transmitter

Part Codes (without ImageFlyer)	Part Codes (with ImageFlyer)
SWEP-TS	SWEP-TS-IF
SWEP-TS-VIDEO	SWEP-TS-VIDEO-IF
SWEP-TS-WIFI	SWEP-TS-WIFI-IF
SWEP-TS-4T	SWEP-TS-4T-IF

Sedao reserves the right to make changes at any time in order to improve design and to supply the best product possible