



Wall Mounting Instructions PRO-V3

The Sedao PRO-V3 player is provided with a metal VESA bracket ready for mounting to either the rear of a screen or to a **flat** wall. The brackets are precision engineered, to ensure a secure fit and to maximise space. The precise engineering means that the installation of the players needs to be done with equal precision, when mounting to a wall. To aid in this use the provided a VESA template.



1) Mount provided VESA template to surface and in ideal location. This is often behind and above screen walling mounting brackets, in order that the player is hidden from sight once the screen is in place

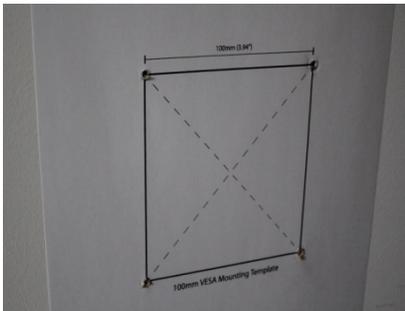

2) Drill holes through marked corners.



3) Position bracket plates one at a time with the small lips on the brackets both either running **horizontally**, screw to wall using the screws provided and the drilled pilot holes (Rawl plugs and other fixings may be required and are not provided). The screw heads must be to bracket holes and flat for the player to sit in place correctly, once fitted.



4) Position PRO-V3 player over the top of the mounted plates, with the lips on the plates covering either edge.



5) Line up the screw holes along the edge of the player with those in the plate lips.

6) Insert mounting screws (provided) and tighten to secure the player to brackets.

CHECK “This way up arrow” is in the correct orientation

Digital Signage For Every Sector | Software | Hardware | Training | Support

Sedao Ltd., Castle Chambers, 26 Castle Street, Barnstaple, Devon. EX31 1DR.
t: +44 (0) 1271 377 977 f: +44 (0) 8714 335 511 w: www.sedao.co.uk e: info@sedao.co.uk